


To Convert 12v/24v switchable NL models to 12V w/accessible solenoid for push-button start,

Once the starter is unassembled,

1. Cut the dual-wire lead currently soldered to the + battery post
2. Solder the dual-wire lead to the "S"-terminal post along with the existing single-wire lead

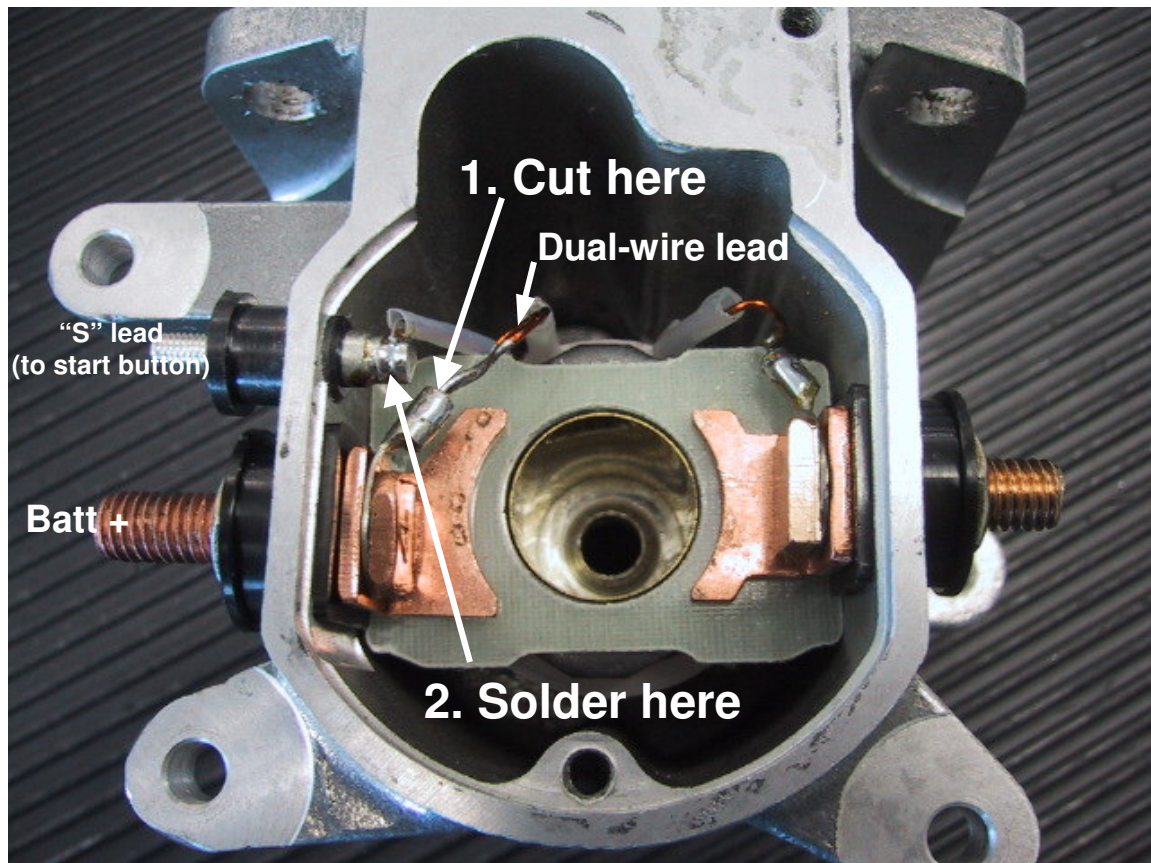

3. Reassemble starter
4. Put Heavy Battery + power cable to to Batt + lead
5. Put Push-to-start Button on "S" Terminal